

UDC 656.259.12

V. I. HAVRYLIUK – Doctor of Physical and Mathematical Sciences, Prof., Dnipropetrovsk national university of railway transport named after academician V. Lazaryan, vl.gavrilyuk@gmail.com

V. V. MELESHKO – Deputy Head of head-office of Ukrzaliznytsia, soyuz_at@mail.ru

THE COMPARATIVE ANALYSIS OF MAIN CALCULATION METHODS OF MATRIX ELEMENTS' IMPEDANCE OF 1520 MM RAIL TRACK GAUGE IN AUDIO FREQUENCY RANGE

Paper presented by Doctor of Technical Sciences, prof. I. V. Zhukovytskyi

Introduction

Knowledge of the accurate values of traction rails impedance over a wide frequency range is necessary for design and modeling audiofrequency track circuits [1,2], determination of traction return current distribution in high-speed railway [3,4], induction coupling between jointless track circuits and track circuit - reader antenna [5] etc. Results of the rail lines impedance investigations were published in several papers notably in the works of Hill et al [6,7], Mariscotti et al [8,9], and others. A theoretical analysis of the rail's impedance frequency dependence is based mainly on the so-called Carson/Pollaczek model, or simply Carson's method that was proposed almost simultaneously by J.R. Carson [10] and F. Pollaczek [11] for determining the AC transmission line impedance considering earth return current. They obtained equations for impedance under such specific assumptions:

- conductors are parallel and infinite length;
- ground under wires is homogeneous and of constant resistivity;
- dielectric and magnetic permittivity of the ground are considered to be equal to unity;
- the displacement currents in the air and the ground are neglected.

Solutions of the equations in [10,11] were obtained for quasi static transverse electromagnetic modes (TEM) of an electromagnetic

field (i.e. in assumption that electromagnetic field include only longitudinal modes).

Based on Carson's work, Wise [12,13] proposed more general expression considered the displacement currents in the air and the ground. Sunde [14] summarized these works and proposed generalized formula. Later some approximate expressions were proposed by Gary [15], Deri et al [16], F.Rachidi [17] and others.

It has been shown in [18] that the validity of the Carson's approximation extends to frequencies of about a few MHz for typical overhead power lines and for earth conductivity of about 0.01 Sm/m. Theoretical consideration of the frequency dependence of traction rails impedance is more complicated task due to

- complex structure of the railroad track consisting of two rails, sleepers, ballast;
- skin-effect in rails;
- strong current dependence of magnetic permeability of rail steel;
- influence of the nearly lied ground due to displacement current being induced in the ground and leakage current due to small resistance between rail and a ground;
- complex shape of rail cross-cut.

Available data of rail impedance investigations [6-9] are related mainly to the 1435 mm gauge rail system and UIC 60 rail type. Reference data for electric impedance of traction rails R65 type and 1520 mm gauge are given

in table 1 [19]. Plot of frequency dependence of impedance built according to [19] has the broken polygonal form, possibly due to a measurement error. Results of rail impedance calculations for the traction current harmonics according to Carson's method didn't provide satisfactory concordance with the data [19] for frequencies greater than 1 kHz.

Table 1

Traction rail impedance [19]

f, Hz	Z, Ohm/km	f, Hz	Z, Ohm/km
25	0.308+0.394i	580	1.077+6.106i
50	0.338+0.725i	720	1.221+7.299i
75	0.401+0.992i	780	1.236+7.803i
175	0.618+1.902i	4545	1.529+43.773i
420	0.935+4.810i	5000	1.700+48.670i
480	0.938+5.318i	5555	1.871+53.567i

However for the many practical important tasks it is necessary to know the frequency dependence of traction rails impedance of R65 type and 1520 mm gauge in audiofrequency range ($10^0..10^4$ Hz).

The aim of the work is to carry out the comparative analysis of main calculation methods of matrix elements' impedance 1520 mm rail track gauge in audio frequency range.

To achieve this goal a brief mathematical formulation of the main impedance calculation methods for conductors above lossy ground were carried out. According to Carson's method and complex depth of earth return method the serial impedance of the rail track 1520 mm gage were calculated and results were compared with literature data.

Mathematical Formulation

A rail line is a distributed circuit and analysis of the electrical processes in it is usually carried out on the basis of the multiconductor transmission line theory with the representation of the lines longitudinal impedance and transverse admittance in a matrix form. The voltage-current relations in distributed circuit can be written as

$$\frac{\partial \dot{V}}{\partial x} = -\underline{Z}(\omega) \dot{I}(\omega); \quad (1)$$

$$\frac{\partial \dot{I}}{\partial x} = -\underline{Y}(\omega) \dot{V}(\omega), \quad (2)$$

where $\underline{Z}$ is a matrix of series impedances per unit length, and $\underline{Y}$ is a matrix of shunt admittances per unit length, x is a coordinate along the line. The matrices $\underline{Z}$ and $\underline{Y}$ are always symmetric/

Series Impedance

At low and medium frequencies ($\leq 10^4$ Hz) the series impedance of a rail is given by

$$\underline{Z} = \underline{Z}_C + \underline{Z}_E + \underline{Z}_G, \quad (3)$$

where $\underline{Z}_C$ is the internal impedance which is varied due to the skin; $\underline{Z}_E$ is the impedance due to production of magnetic fields in the surroundings; $\underline{Z}_G$ is the impedance due to ground influence.

For single track consisting of two rails above lossy ground the diagonal elements of a series impedance matrix Z_{ii} ($i=1,2$) are the values of a rail self impedances (p.u.l.), defined as the ratio of the voltage drop (p.u.l.) to the current flowing in the rail and returning through the earth.

Off-diagonal elements of a series impedance matrix Z_{ij} ($i, j=1,2$) are mutual impedances between i -th and j -th conductors and defined as the ratio of the induced voltage (p.u.l.) in i -th conductor to the current in j -th conductor. Both the self and mutual impedances are affected by the earth return current.

Self impedance

Self impedance of the conductor is a sum of two components as follows

$$Z_{ii} = Z_{Cii} + Z_{Eii}, \quad (4)$$

where Z_{Cii} is the internal impedance of the line conductor, Z_{Eii} - is the external impedance of the conductor and equal to the sum of the Z_{Egii} - geometric impedance due to reactance involved in the magnetic field in the air (external inductance), and Z_{gii} - the ground-return

impedance of the conductor (due to the earth contribution).

$$Z_{Eii} = Z_{Egii} + Z_{gii}. \quad (5)$$

The external self-impedance of the conductor is equal $Z_{Eii} = j\omega L_{ii}$, where L_{ii} is an external inductance of the conductor that is given by

$$L_{ii} = \frac{\mu_0}{2\pi} \ln \frac{2h_i}{r_i}, \quad (6)$$

where $\mu_0 = 4\pi \cdot 10^{-7}$ H/m is the magnetic permeability constant, h_i is the height of the conductor above the ground and r_i is the radius of the conductor.

The ground-return impedance of the conductor can be written as

$$Z_{gii} = R_{gii} + X_{gii}. \quad (7)$$

The mutual impedance

The mutual impedance Z_{ij} of two conductors i and j can be written as

$$Z_{ij} = Z_{mij} + Z_{gij}, \quad (8)$$

where $Z_{mij} = j\omega L_{ij}$ is the impedance due to mutual inductance L_{ij} between the two conductors supposing the conductors and the ground are perfectly conductive and Z_{gij} is the impedance of the earth return path that is common to the currents in conductors i and j . The mutual inductance L_{ij} is defined by geometric parameters of the line conductor system (fig. 1) and can be written as

$$L_{ij} = \frac{\mu_0}{2\pi} \ln \frac{D_{ij}'}{D_{ij}} = \frac{\mu_0}{2\pi} \ln \sqrt{\frac{d_{ij}^2 + (h_i + h_j)^2}{d_{ij}^2 + (h_i - h_j)^2}}; \quad (9)$$

where D_{ij} is the distance between conductors i and j , and D_{ij}' is the distance between conductor i and the image of conductor j ; other geometric parameters are illustrated in fig. 1.

The ground-return impedance (due to the earth contribution) can be written as

$$Z_{Gij} = R_{Gij} + jX_{Gij}. \quad (10)$$

The internal impedance of a conductor is given by

$$Z_{Cii} = R_{Cii} + jX_{Cii}, \quad (11)$$

where R_{Cii} is the internal resistance and $X_{Cij} = \omega L_{Cii}$ is the internal reactance relevant to the internal inductance L_{Cii} .

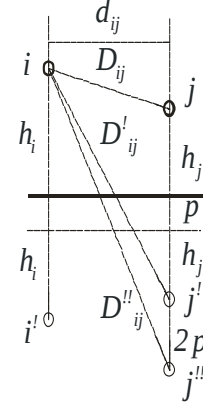


Fig. 1. Geometry of conductors i , j and their images

Assuming uniform current density the internal self resistance and inductance of a circular cross-section conductor are given by well-known simple formulae available for the preliminary calculation

$$R_{Cii} = (\sigma S)^{-1}, \quad L_{Cii} = \frac{\mu\mu_0 r_i}{8\pi}, \quad (12)$$

where σ is the conductivity of a conductor's material, S is a cross-sectional area of the conductor, μ - relative magnetic permeability.

The radius of an equivalent circular cross-section conductor for a rail may be evaluated with two different expressions [9,18]. At low frequency, where the current is distributed almost uniformly across the rail section, equivalent radius may be computed as

$$r_i = \sqrt{S/\pi}. \quad (13)$$

At high frequency, where the current is distributed almost along the conductor perimeter, equivalent radius may be computed as

$$r_i = P_r / 2\pi, \quad (14)$$

where P_r is a cross-section rail perimeter.

Expressions (12)- (14) doesn't provide accurate estimation of rail internal self resistance

and inductance due to a complex rail cross-section shape, the skin effect at AC and changing of a magnetic permeability with current variation at DC. For more precision estimation of a rail internal self-impedance a finite-element method (FEM) was used [6].

In present work for the calculation of a rail internal impedance an approximated method based on equivalent cylindrical conductor model considering a skin effect was used [18,20].

According to this method the internal impedance of a cylindrical conductor is given by

$$\underline{Z}_{Cii} = \frac{\rho m}{2\pi r} \frac{\alpha J_0(\alpha m r)}{J_1(\alpha m r)} = \frac{\rho m}{2\pi r} \frac{ber(\sqrt{2} r/\delta) + jbei(\sqrt{2} r/\delta)}{ber'(\sqrt{2} r/\delta) + jbei'(\sqrt{2} r/\delta)}; \quad (15)$$

where $m = \sqrt{\frac{\omega \mu \mu_0}{\rho}}$; $\alpha = \exp(j3\pi/4)$,

$\delta = (\sqrt{\pi f \mu \sigma})^{-1}$ is a depth of penetration, ρ is a resistivity of the conductor, J_ν is the Bessel function of first kind and order ν , ber , bei , ker and kei are Kelvin's functions which belong to the Bessel function family, and ber' , bei' , ker' and kei' are their derivatives, respectively. Kelvin's functions are often defined as

$$ber(x) = 1 - \frac{x^4}{2^4(2!)^2} + \frac{x^8}{2^8(4!)^2} - \dots; \quad (16)$$

$$bei(x) = \frac{x^2}{2^2} - \frac{x^6}{2^6(3!)^2} + \frac{x^{10}}{2^{10}(5!)^2} - \dots; \quad (17)$$

and

$$ber(q) + jbei(q) = J_0\left(j^{-1/2}\right). \quad (18)$$

Active and reactive resistances of a cylindrical conductor are given by

$$R_{Cii} = \frac{R_s}{\sqrt{2\pi r_i}} \frac{ber(q)Bei'(q) - bei(q)Ber'(q)}{(ber'(q))^2 + (bei'(q))^2}, \quad (19)$$

$$X_{Cii} = \frac{R_s}{\sqrt{2\pi r_i}} =$$

$$= \frac{ber(q)Ber'(q) - bei(q)Bei'(q)}{(ber'(q))^2 + (bei'(q))^2} \quad (20)$$

$$q = \sqrt{2r_i/\delta}, \quad (21)$$

where $R_s = (\sigma\delta)^{-1}$ is a surface resistance.

Earth Contributions

The correction terms for the self-impedance of i -th conductor and mutual impedance of two conductors i and j due to earth path impedance are derived by Carson [8]:

$$Z_{Gii} = \frac{j\omega\mu}{\pi} \int_0^\infty \frac{\exp(-2h_i\xi)}{\xi + \sqrt{\xi^2 + j\omega\mu\sigma}} d\xi, \quad (22)$$

$$Z_{Gij} = \frac{j\omega\mu}{\pi} \int_0^\infty \frac{\exp[-(h_i + h_j)\xi]}{\xi + \sqrt{\xi^2 + j\omega\mu\sigma}} d\xi. \quad (23)$$

More general expression for mutual ground impedance between two conductors i and j applicable to higher frequency band derived by Sunde [14] is given by

$$Z_{Gij} = \frac{j\omega\mu}{\pi} \times \int_0^\infty \frac{\exp[-(h_i + h_j)\xi]}{\xi + \sqrt{\xi^2 + \gamma_g^2}} \cos(d_{ij}\xi) d\xi \quad (24)$$

where γ_g is a wave propagation constant defined as

$$\gamma_g = \sqrt{j\omega\mu_0(\sigma_g + j\omega\epsilon_0\epsilon_g)}. \quad (25)$$

These expressions contain infinite integrals with complex arguments. For their evaluation Carson has proposed infinite series

$$R_{Gii} = 4\omega 10^{-7} \left\{ \frac{\pi}{8} - b_1 k + b_2 (C_2 - \ln k) k^2 + b_3 k^3 - d_4 k^4 - \dots \right\}, \quad (26)$$

$$X_{Gii} = 4\omega 10^{-7} \left\{ \frac{1}{2} (0.6159315 - \ln k) + b_1 k - d_2 k^2 + b_3 k^3 - b_4 (C_4 - \ln k) k^4 + \dots \right\} \quad (27)$$

$$R_{Gij} = 4\omega 10^{-7} \left\{ \frac{\pi}{8} - b_1 k_m \cos \theta + b_2 [(C_2 - \ln k_m) k_m^2 \cos 2\theta + \theta k_m^2 \sin 2\theta] + \dots \right\}$$

$$+b_3k_m^3 \cos 3\theta - d_4k_m^4 \cos 4\theta - \dots\}, \quad (28)$$

$$X_{Gij} = 4\omega 10^{-7} \left\{ \frac{1}{2} (0.6159315 - \ln k_m) + \right. \\ \left. + b_1k_m \cos \theta - d^2k_m^2 \cos 2\theta + \right. \\ \left. + b^3k_m^3 \cos 3\theta - \right. \\ \left. - b_4[(C_4 - \ln k_m)k_m^4 \cos 4\theta + \right. \\ \left. + \theta k_m^4 \sin 4\theta] \dots \right\}. \quad (29)$$

where

$$b_1 = \sqrt{2}/6; \quad b_2 = 1/16; \quad (30)$$

$$b_i = b_{i-2} \frac{\text{sign}}{i(i+2)}; \quad (31)$$

$$C_1 = 1.3659315; \quad C_i = C_{i-2} + \frac{1}{i} + \frac{1}{i+2}; \quad (32)$$

$$d_i = \frac{\pi}{4} b_i; \quad \theta = \arcsin \left(\frac{d_{ij}}{D_{ij}} \right); \quad (33)$$

$$k = 4\pi\sqrt{5} \cdot 10^{-4} 2h_i \sqrt{f\sigma_g}; \quad (34)$$

$$k_m = 4\pi\sqrt{5} \cdot 10^{-4} D_{ij}' \sqrt{f\sigma_g}. \quad (35)$$

These approximations are valid for a limited range of frequencies, and medium frequencies are not covered [18].

The Complex Depth of Earth Return method

The complex depth of earth return method [15,16] assumes that the current in conductor i returns through an imagined earth path located directly under the original conductor at a depth of $(h_i + 2p)$ as shown in fig. 1, where p is the skin depth of the ground. Thus, the self and the mutual impedances can be written as

$$Z_{Eii} = j\omega \frac{\mu_0}{2\pi} \ln \frac{2(h_i + p)}{r_i}; \quad (36)$$

$$Z_{ij} = j\omega \frac{\mu_0}{2\pi} \ln \frac{D_{ij}'}{D_{ij}} =$$

$$= j\omega \frac{\mu_0}{2\pi} \ln \sqrt{\frac{d_{ij}^2 + (h_i + h_j + 2p)^2}{d_{ij}^2 + (h_i - h_j)^2}}; \quad (37)$$

$$\text{where } p = \sqrt{\rho / j\omega\mu_0}.$$

Results

The impedance of traction rails R65 type and 1520 mm gauge were calculated using formulas (3) - (36). The correction terms for the self- and mutual impedance of the rails due to earth path impedance were determined by using two above considered methods - Carson's method with representation of integrals as infinite series (22)-(35) and complex depth of earth return method (36),(37). Calculations have been performed for such parameters of traction rail system: perimeter of rail cross-section $P_r = 0.7$ m, distance between rails' axes $d_{ij} = 1.6$ m, height rails above a ground $h_i = 0.5$ m, conductivity of the ground $\sigma_g = 0.1$ Sm/m, steel resistivity $\sigma_s = 0.21$ Ohm mm²/m, steel relative permeability $\mu = 100$.

The rail loop electrical parameters (p.u.l.) are obtained as

$$R = (R_1 + R_2) = 2R_1; \quad (38)$$

$$L = 2(L_1 - L_{12}), \quad (39)$$

where $R_1 = R_2$ and $L_1 = L_2$ - self-resistance and self inductance of rails, respectively, L_{12} - mutual inductance of rails.

Frequency dependences of the calculated active resistance R and inductance L (p.u.l.) of rail loop for tracks 1520 mm width and P65 rail type are shown in fig. 2.

Also in fig. 2 the frequency dependences of the rail loop resistance and inductance (p.u.l.) for tracks 1520 mm plotted according to reference data [19] are shown. Plot according to data [19] looked like zigzag broken line that probably due to precision of measurements.

Values of rail loop resistance R calculated by Carson's method and complex depth of

earth return method are in good agreement with the data [19] (fig. 2), while the values of inductance L calculated by Carson's method and the complex depth of earth return method are quite different to each other and to data [19].

The resistance and inductance of the traction rail of 1435 gauge [6-9] are also represented in fig. 2 for comparison. Data [6,8] were measured for railroad section with length of 36 m, type of sleepers - concrete and wooden, frequency range – 1 Hz..25 kHz.

Serial rail loop resistance and inductance were measured in [8] for loop circuit with the UNI 60 type of rails, cross-section area – 7679 mm², full length - 5.8 m, length between voltage terminals - 5.2 m. The data of [8] were calculated on 1 km length and also shown in fig. 2.

Since data [6-9] have been obtained for the other types of tracks with 1435 mm gauge, and other types of rails, sleepers etc., these data were different from data for traction rails of 1520 mm gauge and presented in fig. 2 for qualitative comparison.

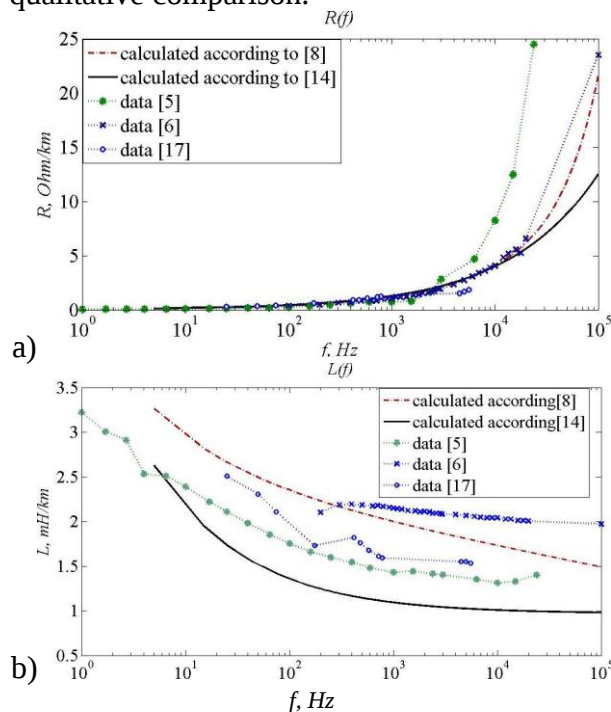


Fig. 2. Frequency dependences of the resistance R (a) and inductance L (b) (p.u.l.) of for traction rails loop

In this way, it may be concluded that the behaviour of the frequency dependences of traction rail's impedance obtained by calculations according to Carson's method and complex depth of earth return method are in good qualitative agreement with the data [6-9] in frequency range $10^0..10^5$ Hz.

The numerical values of the results calculated for tracks 1520 mm type according to Carson's method and complex depth of earth return method differ from reference data [19], and these differences were increased with increasing of frequency.

These differences may be explained by differences of numerical values of the basic electrical parameters of the traction systems using for calculations in present work and parameters of the systems under measuring [6-8]. Another reasons of obtained differences in calculated and measured results may be due to error of calculation methods [10,11,15,16] caused by small height ($h_i \leq 1$ m) of rails above lossy ground and due to electrical connection between rails and a ground.

Such miscalculation can be eliminated by using correction factors in calculation expressions.

Conclusion

With the aim of comparative analysis of main calculation methods of matrix elements' impedance for 1520 mm rail track gauge in audio frequency range a brief mathematical formulation of two methods for calculation of traction rails' impedance with consideration of earth return current has been carried out.

The applicability of Carson's method and complex depth of earth return method for calculations of impedance of 1520 mm track gauge in frequency range $10^0..10^5$ Hz have been confirmed.

The observed differences of calculated results and measured data may be eliminated by correct choice of parameters in the calculation formulas.

Bibliographic list

1. Mariscotti, A. Modeling of audiofrequency track circuits for validation, tuning, and conducted interference prediction [Text] / A. Mariscotti, M. Ruscelli, M. Vanti // IEEE transactions on intelligent transportation systems. – 2010. – Vol. 11. – No. 1. – P. 52-60.
2. Havryliuk, V. I. Modelling of traction current influence on tonal frequency rail circuits [Text] / V. I. Havryliuk // Electromagnetic compatibility and safety on railway transport. – 2011. – No. 2. P. 6-10.
3. Wen Huang Study on Distribution Coefficient of Traction Return Current in High-Speed Railway [Text] / Wen Huang, Zhengyou He, Haitao Hu, Qi Wang // Energy and Power Engineerings. – 2013. – No. 5. – P. 1253-1258
4. Havryliuk, V. I. Analysis of electromagnetic interference of traction power supply system in rail circuits [Text] / V. I. Havryliuk // Вісник Дніпропетровського національного університету залізничного транспорту. – 2003. – No. 1. – P. 6-10.
5. Lin-Hai Zhao Induction coupling between jointless track circuits and track-circuit-reader antenna [Text] / Lin-Hai Zhao, Wei-Shi Shi // Progress in electromagnetics research. – 2013. – Vol. 138. – P. 173-196.
6. Carpenter, D. C. Railroad track electrical impedance and adjacent track crosstalk modeling using the finite-element method of electromagnetic systems analysis [Text] / D. C. Carpenter, R. J. Hill // IEEE transactions on vehicular technology. – 1993. – Vol. 42. – No. 4. – P. 555-560.
7. Hill, R. J. Rail Track Distributed Transmission Line Impedance and Admittance: Theoretical Modeling and Experimental Results [Text] / R. J. Hill, D. C. Carpenter // IEEE transactions on vehicular technology. – 1993. – Vol. 42. – No. 2. – P. 225-230.
8. Mariscotti, A. Measurement of the Internal Impedance of Traction Rails at 50 Hz [Text] / A. Mariscotti, P. Pozzobon // IEEE transactions on instrumentation and measurement. – 2000. – Vol. 49. – No. 2. – P. 294-299.
9. Mariscotti, A. Determination of the Electrical Parameters of Railway Traction Lines: Calculation, Measurement, and Reference Data [Text] / A. Mariscotti, P. Pozzobon // IEEE transactions on power delivery. – 2004. – Vol. 19. – No. 4. – P. 1538-1546.
10. Carson, J. R. Wave propagation in overhead wires with ground return [Text] / J. R. Carson // Bell Syst. Tech. J. – 1926. – Nr. 5. – P. 539-554.
11. Pollaczek, F. On the field produced by an infinitely long wire carrying alternating current [Text] / F. Pollaczek // Elektrische Nachrichten Technik. – 1926. – Vol. III. – No. 9. – P. 339-359.
12. Wise, W. H. Propagation of High Frequency Currents in Ground Return Circuits [Text] / W. H. Wise // Proc. Inst. Radio Engrs. – 1934. – Nr. 22. – P. 522-527.
13. Wise, W. H. Effect of Ground Permeability on Ground Return Circuits [Text] / W. H. Wise // Bell Syst. Tech. J. – 1931. – Nr. 10. – P. 472-484.
14. Sunde, E. D. Earth conduction effects in transmission systems, 2nd ed. [Text] / E. D. Sunde. – Dover Publications, 1968. – P. 99-139.
15. Gary, C. Approche complète de la propagation multifilaire en haute fréquence par l'utilisation des matrices complexe [Text] / C. Gary // EDF Bull. de la direction des études et recherches Série B. – 1976 No. ¾. – P. 5-20.

16. Deri, A. The complex ground return plane. A simplified model for homogenous and multilayer earth return [Text] / A. Deri, G. Tevan, A. Semlyen, A. Castanheira // IEEE trans. on power systems. – 1981. – Vol. 100. – Nr. 8. – P. 3686-3693.
 17. Rachidi, F. Transient analysis of multi-conductor lines above a lossy ground [Text] / F. Rachidi, C. A. Nucci, M. Ianoz // IEEE trans. power delivery. – 1999. – Vol. 14. – Nr. 1. – P. 294-302.
 18. Yaw-Juen Wang. A Review of Methods for Calculation of Frequency-dependent Impedance of Overhead Power Transmission Lines [Text] / Yaw-Juen Wang, Shi-Jie Liu // Proc. Natl. Sci. Counc. ROC(A). – 2001. – Vol. 25. – No. 6. – P. 329-338.
 19. Аркатов, В. С. Рельсовые цепи магистральных железных дорог: Справочник. – 3-е изд. [Текст] / В. С. Аркатов, Ю. В. Аркатов, С. В. Казеев, Ю. В. Ободовский // Изд-во «Миссия-М», 2006. – 496 с.
 20. Stevenson, W. D. Elements of Power System Analysis [Text] / W. D. Stevenson // McGraw-Hill, third edition, 1975. – 423 p.
- Ключові слова:** рейки, частотно-залежний імпеданс, метод Карсона, метод комплексної товщини поверхневого шару землі.
- Ключевые слова:** рельсы, частотно-зависимый импеданс, метод Карсона, метод комплексной толщины поверхностного слоя земли.
- Keywords:** traction rails, frequency-dependent impedance, Carson's method, complex depth of earth return.
- Надійшла до редколегії 27.05.2014